



Installing a Carver Slide Track Kit


Carver Slide Track Kits are available in 18", 24", 36" 48" and 60" lengths to accommodate virtually any boat and bimini top.

All Slide Track Kit packages contain:

- (2) - Aluminum Slide Tracks
- (2) - Sliding Deck Hinges with combined Slide Locks
- (2) - Side-Mount Sliding Deck Hinges
- (2) - Slide Locks (for use with side-mount hinges)
- (4) - End Caps

All necessary screws for mounting.

(All screws are #8 x 1" Stainless Steel).

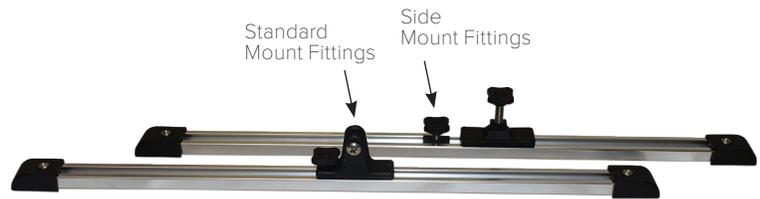

Slide track should be installed on a level surface and may be mounted on top of the gunnel or on the inside of the gunnel (side-mounted).

Determine the location for the slide track. Carefully measure and mark the mounting locations making sure the measurements are identical on port and starboard side so that the tracks will be exactly opposite. Slide tracks are pre-drilled for easy installation.

Use a 1/8" drill bit to drill screw holes. If drilling into fiberglass, it is important to hollow out the drill hole with the drill bit to avoid cracking the fiberglass when screws are tightened. Insert all screws and tighten securely.

Slide the appropriate hinges into the track (combination hinges for standard mount track or side-mount hinges and slide locks for side-mounted track). The locks should be positioned forward of the hinges and tightened to a fixed position. Attach the end caps using the screws provided. The main (long) bow may now be inserted into the track by attaching the eye ends to the deck hinges. Adjust the position of the bimini top by loosening the locks and sliding them into the desired position. Always retighten the slide locks after adjusting the position of the bimini top.



Carver by Covercraft Industries, LLC

212 N. Lyles Ave., Landrum, SC 29356

More Information at CarverCovers.com
or call (888) 48-COVER.

The Best Covers Under the Sun™