

Suction Cup Tie-Downs Instructions




Product Features:

- Perfect for hundreds of tie down applications where there simply isn't an anchor point.
- Giant 3-1/4" suction cups with toggle ball ties stick to auto finishes, smooth flat boat finishes and windows.
- Great for mooring!
- 6" ties stretch to 11". 4 per pack.
- ***Not recommended for trailering.***
- No cleats, knots or hardware needed!
- Each suction cup holds 60 lbs.
- Won't harm auto/marine finishes or gel coat.
- **Ideal for:** Car, Truck, Boat or Home use.

Instructions:

Step 1 - Wipe cup and surface CLEAN and DRY. Suction cup tie-down may be used on clean, dry, smooth, flat non-porous surfaces. They will not work on pontoon boats and will not work on any surface that is not smooth and flat. Do not use underwater.

Step 2 - Attach tie-downs to sewn-in boat cover tie-down loop located in the hem of the cover by either method shown. Space the suction cup tie-downs evenly in the hem. Not every tie-down loop will need a suction cup – a general rule of thumb is to space them out evenly – using every 2nd-3rd tie-down loop in the hem to secure the cover.

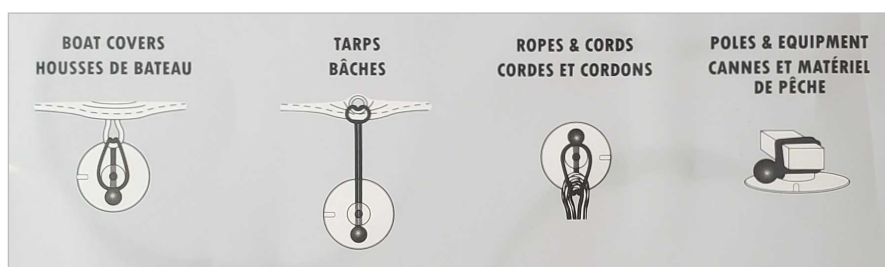

Step 3 - Pull tight, stick cup to surface and press center firmly.

Step 4 - Cup may be attached first if desired.