



Assembly Instructions for T-Shade™ T-Top Shade Extension

How to Prolong the Life of Your T-Shade™

- Avoid letting water or snow stand on the shade.
- Do not exceed 35mph when in use.
- Allow T-Shade™ to dry thoroughly before folding for storage. Always store when not in use.

Carver Limited Warranty

The materials and workmanship are guaranteed to be free of defects at the time of manufacture. The length of the warranty is determined by the type of material ordered. The material/frame have separate warranties. Please visit our website, www.carvercovers.com for detailed limited warranty information.

Warranty coverage commences on the original date of purchase. The warranty does not cover normal wear, weather soiling, stains from environmental pollution, and/or standing water, cuts from sharp objects, neglect, accident or misuse. The Bimini Top must be properly installed, utilized and maintained. The length of the warranty is determined by the type of material ordered.

Carver by Covercraft Industries, LLC and/or seller provide this warranty in lieu of all other warranties, expressed or implied. Carver by Covercraft Industries, LLC and/or seller disclaim all liability for special, incidental or consequential damages.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequences damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state to state or province to province.


Frame & Fabric come with a 5 Year Limited Warranty

Call before returning product under warranty to receive a Return Merchandise Authorization Number (RMA#) at (888) 48-COVER, then send warranty claims to:

Mailing/Shipping Address

Carver by Covercraft Industries, LLC
212 N. Lyles Ave., Landrum, SC 29356

Please enclose a note describing the defect and be sure to include your full name, address and phone number inside the package.

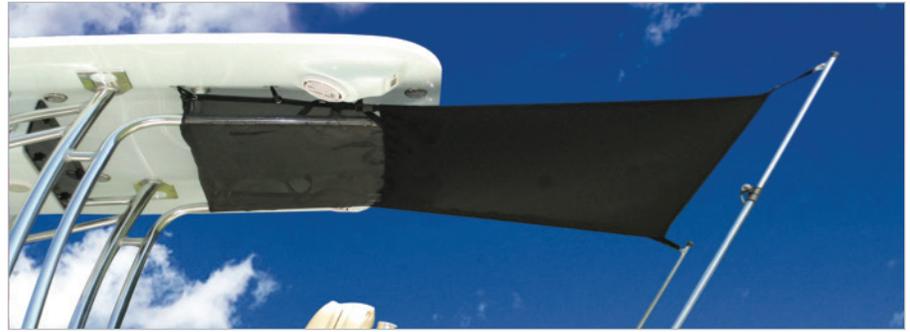

Package Includes:

- (1) - Shade Extension with Quick-Release Buckles, Straps & Stainless Steel Snap Hooks
- (2) - Aluminum Adjustable Support Poles with Nylon Fittings
- (2) - Foam Protectors
- (4) - Suction Cups (for use with Hard Tops)
- (1) - Storage Bag

Optional Tools for Installation:

- Alcohol based spray liquid (ex. Windex)
- Scissors
- Lighter



To Install Shade Extension:

Step 1: Remove the shade extension canvas from the storage bag. Place the 7/8" aluminum tubing end of the adjustable support pole into the rod holder at the stern of the boat. (To use the foam protectors, remove the vinyl end of the support pole, spray the inside of the foam protectors with an alcohol based spray and slide onto the bottom of the support pole. Re-install with vinyl end.)

Step 2: Attach the T-Shade™ canvas to the T-Top using the 4 sewn-in straps with quick-release buckles. Loop the straps around the T-Top tubing and insert the loose end of the strap into the top slot of the quick-release buckle from back to front, pulling the end of the strap toward you. Continue threading the strap over the center bar of the buckle and into the bottom slot of the buckle. The strap will now be fully adjustable by pulling down on the loose end of the strap. The 4 straps should be evenly placed across the tubing of the T-Top. If mounting a Hard Top, a set of four marine-grade suction cups are provided to create mounting points for the T-Shade™ straps. Refer to package instructions for suction cup installation. Leave the straps loose until T-Shade™ extension is fully installed.

Step 3: Attach stainless steel snap hook to the eye strap fitting located at the top of the adjustable support pole. Tighten the strap on the end of the support pole and adjust the support pole to desired height. For best performance, the height of the support poles should be equal to or lower than the height of the T-Top or Hard Top. You may need to alternate between tightening the straps and adjusting the support pole height (70" maximum extension) until there is enough tension to fully extend the T-Shade™ canvas to cover the rear of the boat.

Step 4: After all straps have been adjusted to the desired length, you may use a pair of scissors to trim the end of the straps, leaving approximately 6" of webbing. Using caution, lightly singe the cut edge of the webbing using a cigarette lighter to fuse the yarns and prevent the webbing from unraveling. DO NOT SET ON FIRE AND BE SURE TO EXTINGUISH ANY FLAMES.

To Remove:

Lower adjustable support poles and unhook snap hook from support poles. Unfasten all quick-release buckles from T-Top. Easily store collapsed support poles in side storage areas of boat. Fold or roll shade extension and place in storage bag and stow.

